

# IBH

In-Between  
Handling  
Lift Trucks



  
**BIGJOE®**



## In-Between Handling Lift Trucks

### TECHNICAL DATA

#### ELECTRICAL SYSTEM

Model 1018: 12V, 105 A.H. polycase lead acid battery and built-in 8 amp. charger.

Models 1518, 2018: 12V, 125 A.H. polycase lead acid battery and built-in 8 amp. charger.

Models 1524, 2024, 2524: 12V, 155 A.H. polycase lead acid battery and built-in, fully automatic 15 amp. "smart" charger.

#### STRUCTURAL SYSTEM

Mast construction utilizes premium alloy, structural channel and I-beam.

Inner mast and carriage are fully rollered with tapered bearings. Dual lift chains

Rigid steel chassis, welded distortion-free.

Shaft-type forks for easy adjustment.

Tubular straddles on 1018/1518/1524/2018 series.

Solid bar straddles on 2024/2524 series.

#### HYDRAULIC SYSTEM

Infinitely variable ball-type lowering valve provides full range operator control and no-drift check in neutral.

Gear pump is sized to lift requirements to provide good performance at modest power draw.

Full system filtration is provided on the intake side of the pump which prevents foreign matter from entering any part of the system.

Built-in relief valve protects system from overload.

Pressure-compensating flow control valve at base of lift cylinder on telescopic models regulates lowering speed.

Reservoir is removable and comes equipped with foam-filter cap.

Chrome plated lift cylinder rod provides smooth lift/lower operation and long life.

#### SAFETY FEATURES

Dual, adjustable and slip-resistant floor locks for secure positive grip.

Flow control valve on telescopic models.

Screen guard.

Dual chain.

Keylock to prevent unauthorized usage of truck.

#### OPTIONS

36" wide carriage.

Fully automatic 15 amp. charger.

Steer wheel.

AC controls — 110V-1Ø-60HZ, 220V-1Ø-60HZ and 220V-3Ø-60HZ.

Adjustable restrictor valve.

Adjustable straddles - 38" to 50" I.D. at 4" increments.

Charger light on dash panel.

Lift limit switch w/ override.

Lift limit switch w/o override.


Load backrest.

Remote lift/lower...from pushbutton station.

*See wheel options under "wheels".*

#### CERTIFICATION

ANSI B56.10

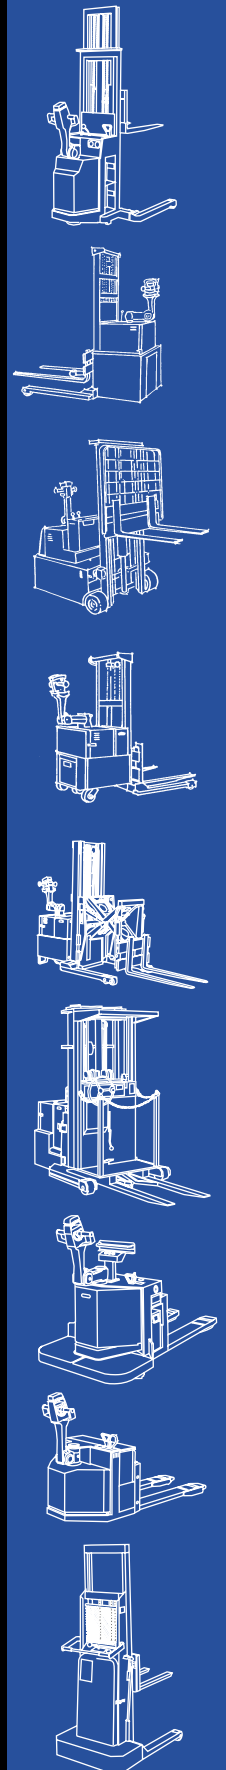

Big Lift LLC  
1060 N. Garfield Street, Lombard IL 60148  
Phone 630-916-2600 • Fax 630-916-0667  
[www.bigjioeforklifts.com](http://www.bigjioeforklifts.com)

Big Joe Manufacturing Company will not assume liability for injuries or damage arising from, or caused by, the removal of any safety devices from their vehicles by user. Because of the Big Joe policy of continuing product improvements, specifications are subject to change without notice.



## In-Between Handling Lift Trucks

### STANDARD EQUIPMENT

- **High Strength Construction.**  
High grade steel mast construction features interlocked channel and I-beam design with roller bearing surfaces. Mast and carriage is of fully-rollered construction for smooth, long-wearing performance. This type of construction accommodates high lifting stresses and maintains load stability.
- **Infinitely Variable Lowering Valve.**  
Ball-type lowering valve provides full range operator control and no-drift check in neutral.
- **Electrical System.**  
Lift motor is specially selected for peak efficiency at torque and RPM lift pump requirements. All cables and wiring are color-coded and/or numbered for easy servicing.
- **Floor Locks.**  
Dual, adjustable and slip resistant for secure positive grip.
- **Gear Pump.**  
Sized to lift requirements to provide peak performance at modest power draw.
- **Full System Filtration.**  
Provided on the intake side of the pump. Prevents foreign matter from entering system.
- **Built-In Relief Valve.**  
Protects system from overload.
- **Chrome Plated Lift Cylinder.**  
Provides smooth lift/lower operation and long life.
- **Shaft-type Forks.**  
Allows easy adjustment.
- **Pressure-Compensated Flow Control Valve.**  
Located at base of lift cylinder, regulates lowering speed (on telescopic models only).
- **Rigid Steel Chassis.**  
Continuous seam-welded distortion-free.
- **Wheels.**  
4" steel load wheels are standard. Optional wheels: 3" and 6" single; 3" and 4" tandem. 6" steel caster wheels are standard. All wheels available in steel, polyurethane or phenolic. 3" wheel not available in phenolic.

### OPTIONS

*(other options available, consult factory)*

- **Adjustable Straddle Option**  
Available for the straddle I.D. range of 38" to 50". Adjusts in 4" increments. Will allow the truck to work with a variety of pallet sizes. Ideal if future pallet requirements may change.



### SPECIFICATIONS


|                   |                                                                                      |
|-------------------|--------------------------------------------------------------------------------------|
| Lifting Capacity: | 1,000 to 2,000 lbs. at 18" load centers.<br>1,500 to 2,500 lbs. at 24" load centers. |
| Lift Range:       | 57" - 144"                                                                           |
| Power System:     | 12 volt with built-in charger.                                                       |
| Turning Radius:   | From 45 <sup>11</sup> / <sub>16</sub> "                                              |

#### SPECIFICATIONS FOR ALL IBH MODELS

|                          |                                                              |
|--------------------------|--------------------------------------------------------------|
| Battery:                 |                                                              |
| 1018 Series:             | 12V, 125 A.H. polycase lead acid                             |
| 1518, 2018 Series:       | 12V, 125 A.H. polycase lead acid                             |
| 1524, 2024, 2524 Series: | 12V, 160 A.H. polycase lead acid                             |
| Charger:                 |                                                              |
| 1018, 1518, 2018 Series: | 8 amp.                                                       |
| 1524, 2024, 2524 Series: | 15 amp. fully automatic                                      |
| Forks:                   | See charts                                                   |
| Wheel Diameter:          | Load wheels - 4"<br>Caster wheels - 6"                       |
| Clearance:               |                                                              |
| 1018, 1518, 2018 & 1524: | 1 <sup>9</sup> / <sub>16</sub> " floor to bottom of straddle |
| 2024, 2524:              | 2 <sup>1</sup> / <sub>16</sub> " floor to bottom of straddle |


## In-Between Handling Lift Trucks

### Accessories & Attachments

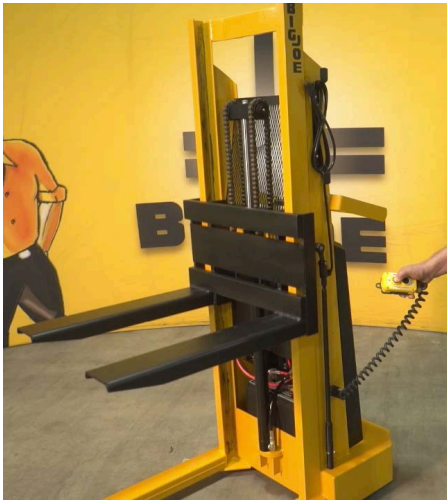


#### Remote Lift/Lower Control

Pushbutton control. Magnetic clip-on.

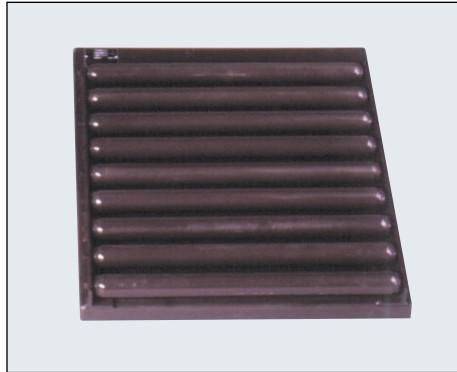

#### Roller Bed

Slip-on roller bed for side or front loading. 1000 lb. capacity. For rigid or adjustable forks.

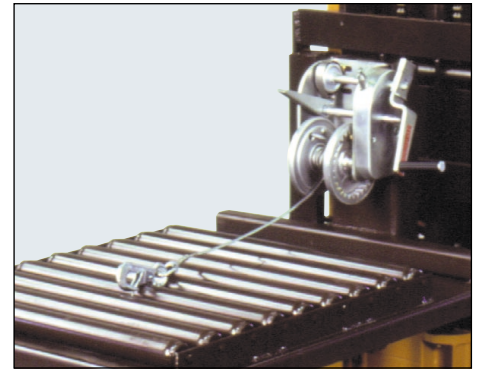

#### Die Puller

Front-load roller platform, 1000 lb. capacity (with proper straddles), complete with winch. Secures to rigid or adjustable forks.



#### Steer Wheel

The steer wheel configuration reduces steering effort and rolling resistance. This system improves maneuverability while making operation easier. Available for all models except 1000 lb. series. The attachment consists of dual 8" x 2" phenolic resin wheels and spring loaded "T" bar handle for maneuvering with rated loads. Not available on R6 or R7 models.



#### Ram

For coil and roll handling 2 1/2" x 26" is standard. Other lengths available.



#### Boom with Hook

Converts lift truck for portable crane operation. 26" long, 300 lb. capacity (500 lb. with proper straddles).



#### Removable Load Platform


Slip-on platform, in standard or special sizes, with smooth or non-slip surfaces, for rigid or adjustable forks. Not for personnel use.




# In-Between Handling Lift Trucks

## DIMENSIONS

### ADJUSTABLE FORK MODELS

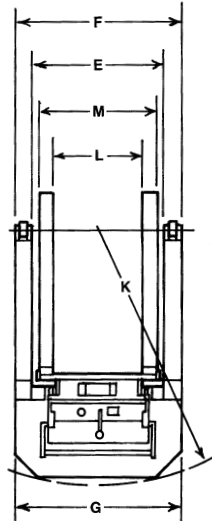

### RIGID FORK MODELS

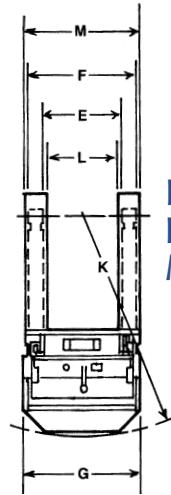

| MODEL NO.                                                          | LIFT CAPACITY | LOAD CENTER | LIFT HEIGHT | COL. HEIGHT<br>↑ | EXT. HEIGHT<br>↑ | STRADDLES-STANDARD             |      |      | OVERALL WIDTH | CHASSIS LENGTH<br>**           | OVERALL LENGTH<br>***          | TURN RADIUS                    | FORKS STANDARD |               |        |                | SHIP WEIGHT |
|--------------------------------------------------------------------|---------------|-------------|-------------|------------------|------------------|--------------------------------|------|------|---------------|--------------------------------|--------------------------------|--------------------------------|----------------|---------------|--------|----------------|-------------|
|                                                                    |               |             |             |                  |                  | LENGTH<br>*                    | I.D. | O.D. |               |                                |                                |                                | I.D.<br>(MIN)  | O.D.<br>(MAX) | LENGTH | LOWERED HEIGHT |             |
|                                                                    |               |             |             |                  |                  |                                |      |      |               |                                |                                |                                |                |               |        |                |             |
| 1000 LBS. CAPACITY, 18" LOAD CENTER<br>RIGID FORKS, NON-TELESCOPIC |               |             |             |                  |                  |                                |      |      |               |                                |                                |                                |                |               |        |                |             |
| 1018-R5                                                            | 1000          | 18          | 60          | 72               | 73½              | 23⅜                            | 17   | 24   | 26⅜           | 20⅝ <sup>16</sup>              | 43 <sup>11</sup> <sup>16</sup> | 45 <sup>11</sup> <sup>16</sup> | 15¼            | 26            | 26¼    | 4½             | 540         |
| 1018-R6                                                            | 1000          | 18          | 72          | 84               | 85½              | 23⅜                            | 17   | 24   | 26⅜           | 20⅝ <sup>16</sup>              | 43 <sup>11</sup> <sup>16</sup> | 45 <sup>11</sup> <sup>16</sup> | 15¼            | 26            | 26¼    | 4½             | 570         |
| 1018-R7                                                            | 1000          | 18          | 84          | 96               | 97½              | 23⅜                            | 17   | 24   | 26⅜           | 20⅝ <sup>16</sup>              | 43 <sup>11</sup> <sup>16</sup> | 45 <sup>11</sup> <sup>16</sup> | 15¼            | 26            | 26¼    | 4½             | 600         |
| ADJUSTABLE FORKS, NON-TELESCOPIC                                   |               |             |             |                  |                  |                                |      |      |               |                                |                                |                                |                |               |        |                |             |
| 1018-A5                                                            | 1000          | 18          | 57          | 72               | 74               | 24⅞                            | 26   | 33   | 33⅞           | 22 <sup>9</sup> <sup>16</sup>  | 46 <sup>11</sup> <sup>16</sup> | 46 <sup>11</sup> <sup>16</sup> | 6              | 24            | 30     | 1¼             | 600         |
| 1018-A6                                                            | 1000          | 18          | 69          | 84               | 86               | 24⅞                            | 26   | 33   | 33⅞           | 22 <sup>9</sup> <sup>16</sup>  | 46 <sup>11</sup> <sup>16</sup> | 46 <sup>11</sup> <sup>16</sup> | 6              | 24            | 30     | 1¼             | 630         |
| 1018-A7                                                            | 1000          | 18          | 81          | 96               | 98               | 24⅞                            | 26   | 33   | 33⅞           | 22 <sup>9</sup> <sup>16</sup>  | 46 <sup>11</sup> <sup>16</sup> | 46 <sup>11</sup> <sup>16</sup> | 6              | 24            | 30     | 1¼             | 650         |
| 1500 LBS. CAPACITY, 18" CENTER<br>RIGID FORKS, NON-TELESCOPIC      |               |             |             |                  |                  |                                |      |      |               |                                |                                |                                |                |               |        |                |             |
| 1518-R5                                                            | 1500          | 18          | 60          | 71½              | 73½              | 23⅜                            | 16½  | 24½  | 26⅜           | 20⅝ <sup>16</sup>              | 43 <sup>11</sup> <sup>16</sup> | 45 <sup>11</sup> <sup>16</sup> | 15¼            | 26            | 26¼    | 4½             | 595         |
| 1518-R6                                                            | 1500          | 18          | 72          | 83½              | 85½              | 23⅜                            | 16½  | 24½  | 26⅜           | 20⅝ <sup>16</sup>              | 43 <sup>11</sup> <sup>16</sup> | 45 <sup>11</sup> <sup>16</sup> | 15¼            | 26            | 26¼    | 4½             | 625         |
| 1518-R7                                                            | 1500          | 18          | 84          | 95½              | 97½              | 23⅜                            | 16½  | 24½  | 26⅜           | 20⅝ <sup>16</sup>              | 43 <sup>11</sup> <sup>16</sup> | 45 <sup>11</sup> <sup>16</sup> | 15¼            | 26            | 26¼    | 4½             | 655         |
| AJUSTABLE FORKS, NON-TELESCOPIC                                    |               |             |             |                  |                  |                                |      |      |               |                                |                                |                                |                |               |        |                |             |
| 1518-A5                                                            | 1500          | 18          | 57          | 71½              | 74               | 24⅞                            | 26   | 34   | 33⅞           | 22 <sup>9</sup> <sup>16</sup>  | 46 <sup>11</sup> <sup>16</sup> | 46 <sup>11</sup> <sup>16</sup> | 6              | 24            | 30     | 1¼             | 630         |
| 1518-A6                                                            | 1500          | 18          | 69          | 83½              | 86               | 24⅞                            | 26   | 34   | 33⅞           | 22 <sup>9</sup> <sup>16</sup>  | 46 <sup>11</sup> <sup>16</sup> | 46 <sup>11</sup> <sup>16</sup> | 6              | 24            | 30     | 1¼             | 660         |
| 1518-A7                                                            | 1500          | 18          | 81          | 95½              | 98               | 24⅞                            | 26   | 34   | 33⅞           | 22 <sup>9</sup> <sup>16</sup>  | 46 <sup>11</sup> <sup>16</sup> | 46 <sup>11</sup> <sup>16</sup> | 6              | 24            | 30     | 1¼             | 690         |
| ADJUSTABLE FORKS, TELESCOPIC                                       |               |             |             |                  |                  |                                |      |      |               |                                |                                |                                |                |               |        |                |             |
| 1518-T8                                                            | 1500          | 18          | 96          | 69               | 116              | 23⅞                            | 30   | 38   | 37⅞           | 22 <sup>13</sup> <sup>16</sup> | 46 <sup>11</sup> <sup>16</sup> | 47¼                            | 9¾             | 28            | 30     | 1¾             | 850         |
| 1518-T9                                                            | 1500          | 18          | 108         | 75               | 128              | 23⅞                            | 30   | 38   | 37⅞           | 22 <sup>13</sup> <sup>16</sup> | 46 <sup>11</sup> <sup>16</sup> | 47¼                            | 9¾             | 28            | 30     | 1¾             | 880         |
| 1518-T10                                                           | 1500          | 18          | 120         | 81               | 140              | 23⅞                            | 42   | 50   | 49⅞           | 22 <sup>13</sup> <sup>16</sup> | 46 <sup>11</sup> <sup>16</sup> | 49 <sup>9</sup> <sup>16</sup>  | 9¾             | 28            | 30     | 1¾             | 930         |
| 1518-T11                                                           | 1500          | 18          | 132         | 87               | 152              | 23⅞                            | 42   | 50   | 49⅞           | 22 <sup>13</sup> <sup>16</sup> | 46 <sup>11</sup> <sup>16</sup> | 49 <sup>9</sup> <sup>16</sup>  | 9¾             | 28            | 30     | 1¾             | 960         |
| 1518-T12                                                           | 1500          | 18          | 144         | 93               | 164              | 23⅞                            | 42   | 50   | 49⅞           | 22 <sup>13</sup> <sup>16</sup> | 46 <sup>11</sup> <sup>16</sup> | 49 <sup>9</sup> <sup>16</sup>  | 9¾             | 28            | 30     | 1¾             | 990         |
| 2000 LBS. CAPACITY, 18" CENTER<br>RIGID FORKS, NON-TELESCOPIC      |               |             |             |                  |                  |                                |      |      |               |                                |                                |                                |                |               |        |                |             |
| 2018-R5                                                            | 2000          | 18          | 60          | 71½              | 73½              | 23⅜ <sup>16</sup>              | 16½  | 24½  | 26⅜           | 20⅝ <sup>16</sup>              | 43½                            | 45 <sup>11</sup> <sup>16</sup> | 15¼            | 26            | 26¼    | 4½             | 635         |
| 2018-R6                                                            | 2000          | 18          | 72          | 83½              | 85½              | 23⅜ <sup>16</sup>              | 16½  | 24½  | 26⅜           | 20⅝ <sup>16</sup>              | 43½                            | 45 <sup>11</sup> <sup>16</sup> | 15¼            | 26            | 26¼    | 4½             | 675         |
| 2018-R7                                                            | 2000          | 18          | 84          | 95½              | 97½              | 23⅜ <sup>16</sup>              | 16½  | 24½  | 26⅜           | 20⅝ <sup>16</sup>              | 43½                            | 45 <sup>11</sup> <sup>16</sup> | 15¼            | 26            | 26¼    | 4½             | 715         |
| AJUSTABLE FORKS, NON-TELESCOPIC                                    |               |             |             |                  |                  |                                |      |      |               |                                |                                |                                |                |               |        |                |             |
| 2018-A5                                                            | 2000          | 18          | 57          | 71½              | 74               | 23 <sup>11</sup> <sup>16</sup> | 26   | 34   | 33⅞           | 22 <sup>13</sup> <sup>16</sup> | 46½                            | 46 <sup>11</sup> <sup>16</sup> | 6              | 24            | 30     | 1½             | 665         |
| 2018-A6                                                            | 2000          | 18          | 69          | 83½              | 86               | 23 <sup>11</sup> <sup>16</sup> | 26   | 34   | 33⅞           | 22 <sup>13</sup> <sup>16</sup> | 46½                            | 46 <sup>11</sup> <sup>16</sup> | 6              | 24            | 30     | 1½             | 705         |
| 2018-A7                                                            | 2000          | 18          | 81          | 95½              | 98               | 23 <sup>11</sup> <sup>16</sup> | 26   | 34   | 33⅞           | 22 <sup>13</sup> <sup>16</sup> | 46½                            | 46 <sup>11</sup> <sup>16</sup> | 6              | 24            | 30     | 1½             | 745         |
| ADJUSTABLE FORKS, TELESCOPIC                                       |               |             |             |                  |                  |                                |      |      |               |                                |                                |                                |                |               |        |                |             |
| 2018-T8                                                            | 2000          | 18          | 96          | 69               | 116              | 23⅞                            | 30   | 38   | 37⅞           | 23¼                            | 46⅝                            | 47¼                            | 9¾             | 28            | 30     | 2              | 875         |
| 2018-T9                                                            | 2000          | 18          | 108         | 75               | 128              | 23⅞                            | 30   | 38   | 37⅞           | 23¼                            | 46⅝                            | 47¼                            | 9¾             | 28            | 30     | 2              | 915         |
| 2018-T10                                                           | 2000          | 18          | 120         | 81               | 140              | 23⅞                            | 42   | 50   | 49⅞           | 23¼                            | 46⅝                            | 49 <sup>9</sup> <sup>16</sup>  | 9¾             | 28            | 30     | 2              | 965         |
| 2018-T11                                                           | 2000          | 18          | 132         | 87               | 152              | 23⅞                            | 42   | 50   | 49⅞           | 23¼                            | 46⅝                            | 49 <sup>9</sup> <sup>16</sup>  | 9¾             | 28            | 30     | 2              | 1005        |
| 2018-T12                                                           | 2000          | 18          | 144         | 93               | 164              | 23⅞                            | 42   | 50   | 49⅞           | 23¼                            | 46⅝                            | 49 <sup>9</sup> <sup>16</sup>  | 9¾             | 28            | 30     | 2              | 1045        |


\*Face of fork to end of load wheels.    \*\*To face of fork.    \*\*\*To end of load wheels.    †For adjustable straddles add: 3 1/8"




# In-Between Handling Lift Trucks

## DIMENSIONS

### NON-TELESCOPIC MODELS

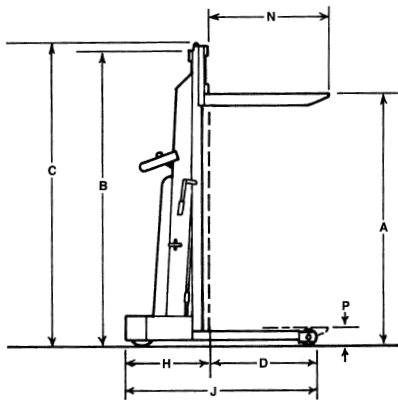

### TELESCOPIC MODELS

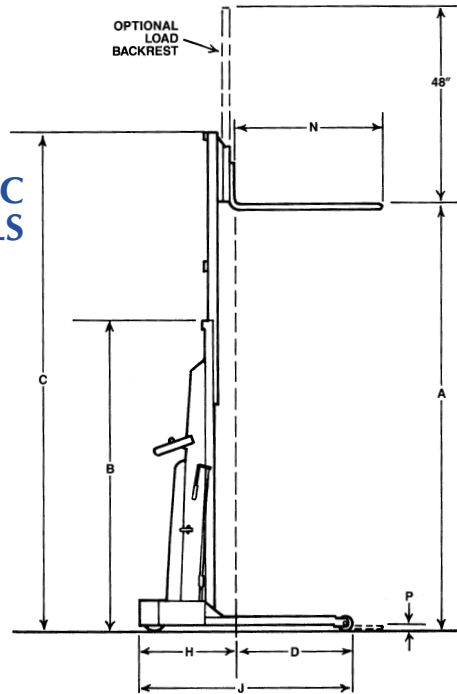

| MODEL NO. | LIFT CAPACITY | LOAD CENTER | LIFT HEIGHT | COL. HEIGHT † | EXT. HEIGHT † | STRADDLES-STANDARD |      |      | OVERALL WIDTH | CHASSIS LENGTH ** | OVERALL LENGTH *** | TURN RADIUS | FORKS STANDARD |            |        |                | SHIP. WEIGHT |
|-----------|---------------|-------------|-------------|---------------|---------------|--------------------|------|------|---------------|-------------------|--------------------|-------------|----------------|------------|--------|----------------|--------------|
|           |               |             | A           | B             | C             | LENGTH *           | I.D. | O.D. |               |                   |                    |             | I.D. (MIN)     | O.D. (MAX) | LENGTH | LOWERED HEIGHT |              |
|           |               |             | D           | E             | F             | G                  | H    | J    | K             | L                 | M                  | N           | P              |            |        |                |              |

#### 1500 LBS. CAPACITY, 24" LOAD CENTER RIGID FORKS, NON-TELESCOPIC

|         |      |    |    |        |    |         |    |    |        |          |          |        |   |    |    |       |     |
|---------|------|----|----|--------|----|---------|----|----|--------|----------|----------|--------|---|----|----|-------|-----|
| 1524-A5 | 1500 | 24 | 57 | 71 1/2 | 74 | 29 3/32 | 26 | 34 | 33 7/8 | 22 13/16 | 51 29/32 | 51 7/8 | 6 | 24 | 36 | 1 1/2 | 764 |
| 1524-A6 | 1500 | 24 | 69 | 83 1/2 | 86 | 29 3/32 | 26 | 34 | 33 7/8 | 22 13/16 | 51 29/32 | 51 7/8 | 6 | 24 | 36 | 1 1/2 | 807 |
| 1524-A7 | 1500 | 24 | 81 | 95 1/2 | 98 | 29 3/32 | 26 | 34 | 33 7/8 | 22 13/16 | 51 29/32 | 51 7/8 | 6 | 24 | 36 | 1 1/2 | 764 |

#### ADJUSTABLE FORKS, TELESCOPIC

|          |      |    |     |    |     |        |    |    |        |        |        |        |       |    |    |   |      |
|----------|------|----|-----|----|-----|--------|----|----|--------|--------|--------|--------|-------|----|----|---|------|
| 1524-T8  | 1500 | 24 | 96  | 69 | 116 | 28 1/2 | 30 | 38 | 37 7/8 | 23 1/4 | 51 3/4 | 52 3/8 | 9 3/4 | 28 | 36 | 2 | 947  |
| 1524-T9  | 1500 | 24 | 108 | 75 | 128 | 28 1/2 | 30 | 38 | 37 7/8 | 23 1/4 | 51 3/4 | 52 3/8 | 9 3/4 | 28 | 36 | 2 | 972  |
| 1524-T10 | 1500 | 24 | 120 | 81 | 140 | 28 1/2 | 42 | 50 | 49 7/8 | 23 1/4 | 51 3/4 | 52 3/8 | 9 3/4 | 28 | 36 | 2 | 1032 |
| 1524-T11 | 1500 | 24 | 132 | 87 | 152 | 28 1/2 | 42 | 50 | 49 7/8 | 23 1/4 | 51 3/4 | 54 1/2 | 9 3/4 | 28 | 36 | 2 | 1057 |
| 1524-T12 | 1500 | 24 | 144 | 93 | 164 | 28 1/2 | 42 | 50 | 49 7/8 | 23 1/4 | 51 3/4 | 54 1/2 | 9 3/4 | 28 | 36 | 2 | 1082 |

#### 2000 LBS. CAPACITY, 24" LOAD CENTER RIGID FORKS, NON-TELESCOPIC

|         |      |    |    |     |         |        |    |    |        |    |        |         |   |    |    |       |      |
|---------|------|----|----|-----|---------|--------|----|----|--------|----|--------|---------|---|----|----|-------|------|
| 2024-A5 | 2000 | 24 | 60 | 77  | 79 1/4  | 28 5/8 | 42 | 50 | 49 7/8 | 24 | 52 5/8 | 49 9/16 | 6 | 28 | 36 | 1 1/2 | 980  |
| 2024-A6 | 2000 | 24 | 72 | 89  | 91 1/4  | 28 5/8 | 42 | 50 | 49 7/8 | 24 | 52 5/8 | 49 9/16 | 6 | 28 | 36 | 1 1/2 | 1020 |
| 2024-A7 | 2000 | 24 | 84 | 101 | 103 1/4 | 28 5/8 | 42 | 50 | 49 7/8 | 24 | 52 5/8 | 49 9/16 | 6 | 28 | 36 | 1 1/2 | 1060 |

#### ADJUSTABLE FORKS, TELESCOPIC

|          |      |    |     |    |         |        |    |    |        |    |        |         |   |    |    |   |      |
|----------|------|----|-----|----|---------|--------|----|----|--------|----|--------|---------|---|----|----|---|------|
| 2024-T8  | 2000 | 24 | 96  | 69 | 115 1/4 | 28 1/2 | 30 | 38 | 37 7/8 | 24 | 52 5/8 | 54 1/2  | 6 | 28 | 36 | 2 | 1285 |
| 2024-T9  | 2000 | 24 | 108 | 75 | 125 1/4 | 28 1/2 | 30 | 38 | 37 7/8 | 24 | 52 5/8 | 49 9/16 | 6 | 28 | 36 | 2 | 1305 |
| 2024-T10 | 2000 | 24 | 120 | 81 | 139 1/4 | 28 1/2 | 42 | 50 | 49 7/8 | 24 | 52 5/8 | 49 9/16 | 6 | 28 | 36 | 2 | 1365 |
| 2024-T11 | 2000 | 24 | 132 | 87 | 149 1/4 | 28 1/2 | 42 | 50 | 49 7/8 | 24 | 52 5/8 | 49 9/16 | 6 | 28 | 36 | 2 | 1385 |
| 2024-T12 | 2000 | 24 | 144 | 93 | 163 1/4 | 28 1/2 | 42 | 50 | 49 7/8 | 24 | 52 5/8 | 49 9/16 | 6 | 28 | 36 | 2 | 1405 |

#### 2500 LBS. CAPACITY, 24" LOAD CENTER RIGID FORKS, NON-TELESCOPIC

|         |      |    |    |     |         |        |    |    |        |    |        |         |   |    |    |       |      |
|---------|------|----|----|-----|---------|--------|----|----|--------|----|--------|---------|---|----|----|-------|------|
| 2524-A5 | 2500 | 24 | 60 | 77  | 79 1/4  | 28 5/8 | 42 | 50 | 49 7/8 | 24 | 52 5/8 | 49 9/16 | 6 | 28 | 36 | 1 1/2 | 980  |
| 2524-A6 | 2500 | 24 | 72 | 89  | 91 1/4  | 28 5/8 | 42 | 50 | 49 7/8 | 24 | 52 5/8 | 49 9/16 | 6 | 28 | 36 | 1 1/2 | 1020 |
| 2524-A7 | 2500 | 24 | 84 | 101 | 103 1/4 | 28 5/8 | 42 | 50 | 49 7/8 | 24 | 52 5/8 | 49 9/16 | 6 | 28 | 36 | 1 1/2 | 1060 |

#### ADJUSTABLE FORKS, TELESCOPIC

|          |      |    |     |    |         |        |    |    |        |    |        |         |   |    |    |   |      |
|----------|------|----|-----|----|---------|--------|----|----|--------|----|--------|---------|---|----|----|---|------|
| 2524-T8  | 2500 | 24 | 96  | 69 | 115 1/4 | 28 1/2 | 30 | 38 | 37 7/8 | 24 | 52 5/8 | 54 1/2  | 6 | 28 | 36 | 2 | 1285 |
| 2524-T9  | 2500 | 24 | 108 | 75 | 125 1/4 | 28 1/2 | 30 | 38 | 37 7/8 | 24 | 52 5/8 | 49 9/16 | 6 | 28 | 36 | 2 | 1305 |
| 2524-T10 | 2500 | 24 | 120 | 81 | 139 1/4 | 28 1/2 | 42 | 50 | 49 7/8 | 24 | 52 5/8 | 49 9/16 | 6 | 28 | 36 | 2 | 1365 |
| 2524-T11 | 2500 | 24 | 132 | 87 | 149 1/4 | 28 1/2 | 42 | 50 | 49 7/8 | 24 | 52 5/8 | 49 9/16 | 6 | 28 | 36 | 2 | 1385 |
| 2524-T12 | 2500 | 24 | 144 | 93 | 163 1/4 | 28 1/2 | 42 | 50 | 49 7/8 | 24 | 52 5/8 | 49 9/16 | 6 | 28 | 36 | 2 | 1405 |

\*Face of fork to end of load wheels.    \*\*To face of fork.    \*\*\*To end of load wheels.    †For adjustable straddles add: 3 1/8"